

Series SGP / OGP


TC of ± 80 ppm/ $^{\circ}\text{C}$ combined with precision tolerances, wide ohmic range / U.S. Patent-No. 4,859,981

A Miba Group Company

The series employs our special METOXFILM, which demonstrates excellent stability and a wide resistance range. Power and voltage ratings are for continuous operation and have all been pretested for steady-state performance as well as momentary overload conditions.

Features


- up to 48 kV operating voltage
- Non-Inductive design
- ROHS compliant
- Voltages up to 60% higher than the values listed – "S"-Version

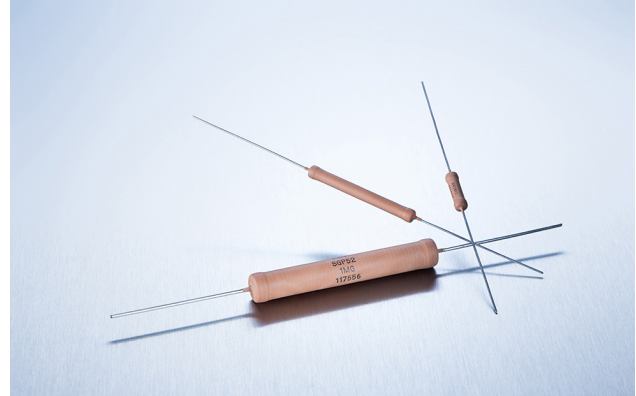


Technical Specifications

Resistance value	100 Ω \leq 10 G Ω (see model specifications)
Resistance tolerance	± 1 % to ± 10 % standard down to ± 0.1 % on special request for limited ohmic values
Temperature coefficient	± 80 ppm/ $^{\circ}\text{C}$ (at $+85^{\circ}\text{C}$ ref. to $+25^{\circ}\text{C}$) down to ± 25 ppm/ $^{\circ}\text{C}$ or lower on special request for limited ohmic values and model no.
Max. operating temperature	$+ 225^{\circ}\text{C}$
Voltage coefficient	(typical) see diagram page 10
Dielectric strength	1,000 V DC max. (25°C , 75 % relative humidity)
Insulation resistance	10 G Ω min. at 1,000 V DC
Overload / overvoltage	5x rated power at 125°C (referenced to specified power at $+125^{\circ}\text{C}$) with applied voltage not to exceed 1.5x maximum continuous operating voltage for 5 sec. ΔR 0.5 % max.
Load life	1,000 hours at 125°C and rated power, components with 1 % tol. ΔR 0.2 % max., extended range ("S") ΔR = 0.5 % max.
Load life stability	typical ± 0.02 % per 1,000 hours
Moisture resistance	MILStd-202, method 106, ΔR 0.4 % max.
Thermal shock	MILStd-202, method 107, Cond. C, ΔR 0.25 % max.
Encapsulation	standard: silicone coating other coating options (like 2xpolyimide, glass) available on request
Other terminals available	screw end caps [6/32", M4 (torque max. 1 Nm), customer-specific], golden leads with diameter 0,8 mm available for SGP series (ask for details)
Lead material	OFHC copper, tin-plated
Weight	depending on model no. (ask for details)

EBG's Non-Inductive design offers an outstanding advantage over other techniques. The design incorporates a unique method of DIGITAL TRIMMING to value. Other less desirable methods include an "analog" method of abrading and removing the resistive material, which frequently results in a weak section. EBG's patented process avoids this potential problem.

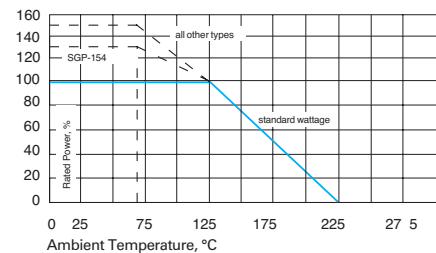

Dimensions in mm [inches]

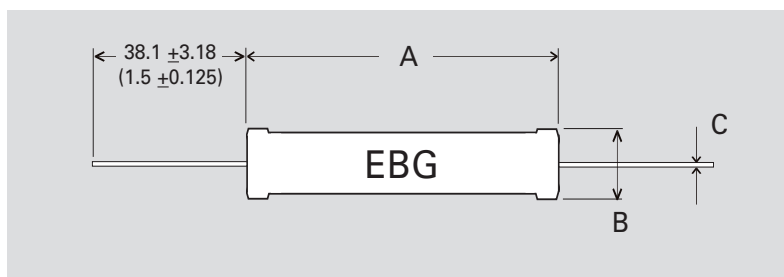

How to make a request

Model.no_ Ohmic value_Tolerance_TCR

For example:

SGP-103 10M 1% 80ppm or
OGP-20 10M 5% 25ppm

Example for high voltage:

SGP-154-S 300M 2% 80ppm or
OGP-39-S 100M 1% 25ppm

Series SGP / OGP




Model Specifications


Model no.	Wattage 25°C	Wattage 75°C	Wattage 125°C	Max. kV	Max. kV "S" **	Resistance values		"S"-Version max.	Dimensions in millimeters (inches)		
						Min. Ω	Max. Ω		A ±0.50 ±0.02	B ±0.50 ±0.02	C ±0.05 ±0.002
OGP-13	1.0	1.0	0.60	1.5	2.4	100	50 M	500 M	13.30 (0.524)	4.20 (0.165)	0.60 (0.024)
OGP-20	1.5	1.5	1.00	2.0	3.2	200	100 M	1 G	19.70 (0.776)	4.20 (0.165)	0.60 (0.024)
OGP-26	1.9	1.9	1.25	4.0	6.4	300	150 M	2 G	26.20 (1.031)	4.20 (0.165)	0.60 (0.024)
OGP-30	2.5	2.5	1.50	5.0	8.0	500	250 M	3 G	32.30 (1.272)	4.20 (0.165)	0.60 (0.024)
OGP-39	3.0	3.0	2.00	6.0	9.6	700	300 M	5 G	39.40 (1.551)	4.20 (0.165)	0.60 (0.024)
OGP-52	3.3	3.3	2.50	10.0	12.0	400	2 G	-	49.50 (1.949)	4.20 (0.165)	0.60 (0.024)
SGP-20	2.5	2.5	1.50	3.0	4.8	200	250 M	1 G	20.20 (0.795)	8.20 (0.323)	1.00 (0.040)
SGP-26	3.7	3.7	2.50	4.0	6.4	250	300 M	1 G	26.90 (1.059)	8.20 (0.323)	1.00 (0.040)
SGP-32	4.5	4.5	3.00	5.0	8.0	300	400 M	1.5 G	33.00 (1.3)	8.20 (0.323)	1.00 (0.040)
SGP-39	5.2	5.2	3.50	8.0	12.8	400	500 M	1.5 G	39.50 (1.555)	8.20 (0.323)	1.00 (0.040)
SGP-52	7.5	7.5	5.00	10.0	16.0	500	750 M	2.5 G	52.10 (2.051)	8.20 (0.323)	1.00 (0.040)
SGP-78	11	11	7.50	15.0	24.0	900	1 G	4 G	77.70 (3.059)	8.20 (0.323)	1.00 (0.040)
SGP-103	12	12	8.00	20.0	32.0	1K2	1 G	2 G	102.90 (4.051)	8.20 (0.323)	1.00 (0.040)
SGP-124	15	15	10.00	25.0	40.0	1K5	1 G	8 G	123.70 (4.870)	8.20 (0.323)	1.00 (0.040)
SGP-148	30	30	20.00	45.0	-	10 K	3 G	10 G	148.00 (5.83)	16.00 (0.63)	-
SGP-154	20	20	15.00	30.0	48.0	2 K	2 G	10 G	153.70 (6.051)	8.20 (0.323)	1.00 (0.040)

** Our resistors are designed for operation in air and non-aggressive atmosphere. For special applications like oil, casting, molding, SF6, etc., please contact us.

OGP series overview

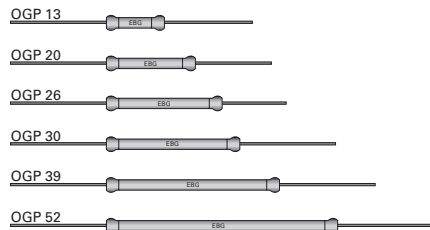

SGP series overview

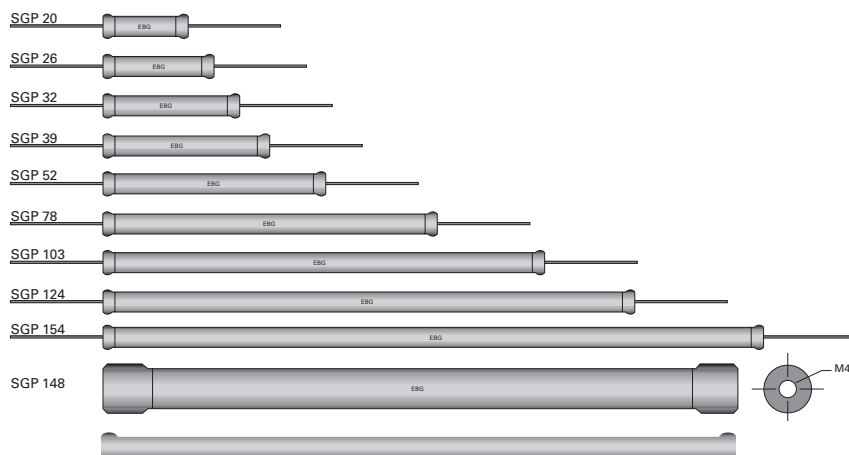

All SGP and SGT types (except 148) are also available with M4 or 6/32 screw end caps. Attention: total length increases when screw end caps are used!

No coating on end areas!

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.


sales@ebg-resistors.com · sales@ebg-us.com

Series SGP / OGP



A Miba Group Company

Typical Voltage Coefficient for SGP series (in ppm per volt)

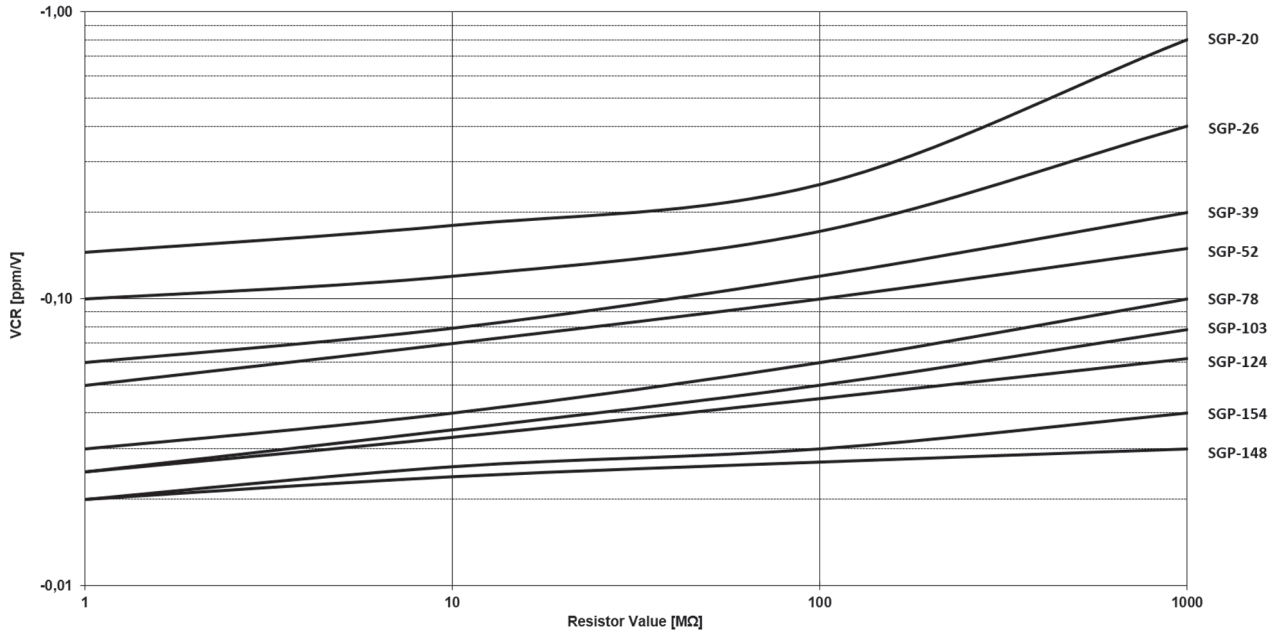

Example:

SGP-154 with 100 MΩ has a typical voltage coefficient of -0,03 ppm/V.

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.