

Series RST5N

100 W Resistor

A Miba Group Company



1/1

The RST5N resistor series is a robust resistor for extreme high Pre-charge pulses. Suitable for high voltages up to 1000V.


Features

- 100 W operating power
- High voltage capable
- Extreme pulse capability
- External cooling possible
- Easy connection via Fast-on
- Robust design



Technical Specifications

Resistance value	25 Ω ≤ 200 Ω (other values on special request)
Resistance tolerance	±5 % to ±10 %
Temperature coefficient	≤ 1000 ppm/°C (referenced to 25 °C, ΔR taken at ~105°C)
Power rating	100 W at 85°C bottom case temperature
Short time overload	2800 W at 70°C for 5s, ΔR = 0.5% max., one time
Maximum operating voltage	≤ 1000 V DC (pre-charge voltage)
Dielectric strength voltage	3 kVrms, 1 min., 50 Hz Leakage current < 1 mA
Insulation resistance	500 MΩ at 1000 V, 10s.
Resistor installation	M5 screw, max. torque 3 Nm
Operating temperature	-55°C to + 155°C
Weight	~148,5 g

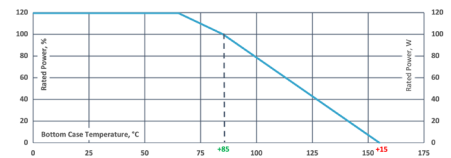

Derating (thermal resist.) RST5N:
1.43 W/K (0.7 K/W)


EBG power resistor cooling requirements

How to make a request

RST5N_Ohmic Value_Tolerance

For example:
RST5N 470R 5%

Dimensions in mm

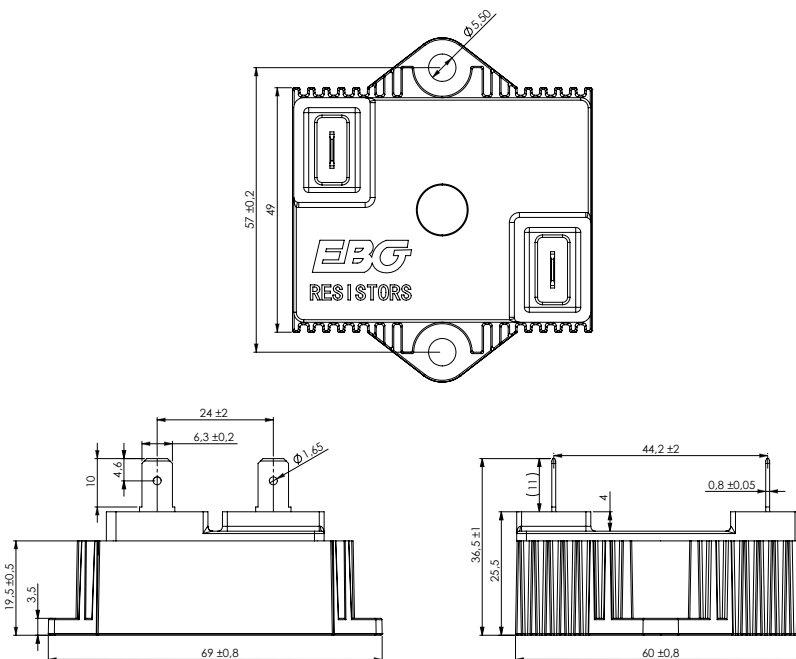

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.