

Series UPR / UPSC

Radial resistors, extremely precise


A Miba Group Company

1/1

The advantage of EBG's metal film resistors is it's particularly high precision in terms of ohmic value, TC and long-term stability.

Features

- High precision ohmic values
- Low temperature coefficient precision resistors
- Long-term stability
- Ohmic range 10 Ω to 5 MΩ
- Non-Inductive design
- ROHS compliant

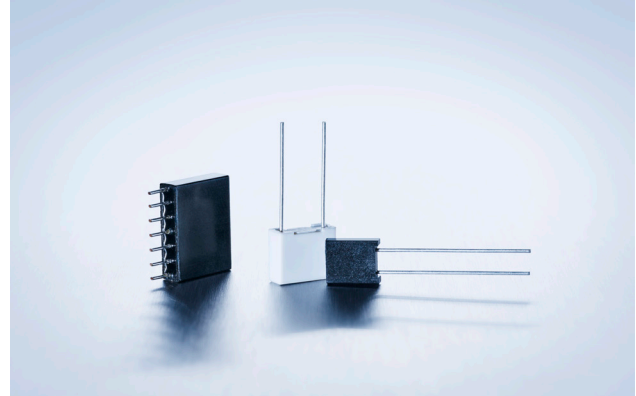

Technical Specifications


Resistance value UPSC: 40 Ω ≤ 5 MΩ
UPR: 10 Ω ≤ 5 MΩ

Resistance tolerance	±1 % standard tolerances to ±0.01 % on special request
Temperature coefficient	±2 ppm/°C to ±25 ppm/°C
Long-term stability	better than ±0.05 % per 2,000 hours of operation
Std. operating temperature	-55°C to +85°C
TC temperature range	-10°C to +70°C (at +85°C ref. to +25°C)
Overload	6.25 times rated power for 5 seconds at voltage not to exceed 1.5 times maximum rated working voltage, ΔR less than 0.1 % + 0.01 Ω
Load life	2,000 hours at 125°C ΔR less than 0.5 % + 0.01 Ω
Moisture resistance	MIL-STD-202, method 106 ΔR less than 0.4 % + 0.01 Ω
Thermal shock	MIL-STD-202, method 107, Cond. B, ΔR less than 0.2 % + 0.01 Ω
Insulation resistance	> 10,000 MΩ at 250 V DC
Low temperature operation	ΔR less than 0.15 % + 0.01 Ω
Dielectric withstanding voltage	ΔR less than 0.15 % + 0.01 Ω
Vibration	ΔR less than 0.2 % + 0.01 Ω
Shock	ΔR less than 0.2 % + 0.01 Ω

Dimensions

Dimensions	Dimensions in millimeter (inches)	
	UPSC	UPR
A	7.50 ± .20 (.295 ± .008)	10.50 ± .30 (.413 ± .012)
B	8.50 ± .20 (.335 ± .008)	9.00 ± .30 (.354 ± .012)
C	2.50 ± .20 (.098 ± .008)	4.00 ± .30 (.157 ± .012)
D	0.63 ± .05 (.025 ± .002)	0.63 ± .05 (.025 ± .002)
E	3.81 ± .38 (.150 ± .015)	7.62 ± .38 (.300 ± .015)
F	25 ± 1 (.98 ± .04)	18 ± 5 (0.71 ± .196)

Model no.	Temperature coefficient ppm/°C	Wattage +70°C	Max. working voltage	Dielect strength V DC
UPSC	± 2 to ± 25	0.20	300	500
UPR	± 2 to ± 25	0.20	250	400

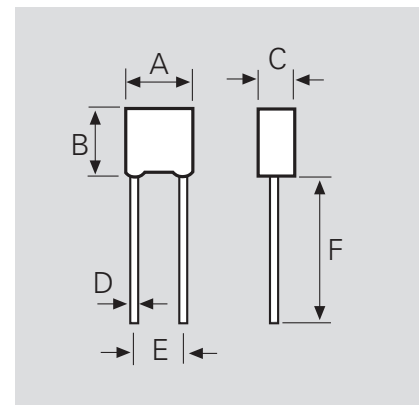

Tests	Conditions	MIL-R-55182/9	Typical drifts
Power conditioning (108)	100 hours/rated power at +125°C 90/30° cycle	-	± 0.02% combined test
Thermal shock (107)	5 cycles -65°C / +150°C	± 0.2 % + 0.01 Ω combined test	
Short time overload	6.25 times rated power / 5 sec.	-	-
Low temperature storage and operation	1h stor. 45 min rated power at -65°C	± 0.15 % + 0.01 Ω	-
	24h stor. 45 min rated power at -65°C	-	+ 0.01 %
Terminal strength (211)	2lb pull test	± 0.2 % + 0.01 Ω	+ 0.01 %
Dielectric withstanding voltage (301)	300 V atmospheric 200 V / 100,000 ft.	± 0.15 % + 0.01 Ω	+ 0.01 %
Resist to soldering (210)	260°C / 5 sec.	± 0.1 % + 0.01 Ω	+ 0.01 %
Moisture resistance (106)	10 days	± 0.4 % + 0.01 Ω	+ 0.01 %
Shock	10 shocks 100g 6ms sawtooth	± 0.2 % + 0.01 Ω	+ 0.01 %
Vibration (204)	10 to 2000 Hz. 20g 8 hours	± 0.2 % + 0.01 Ω	+ 0.01 %
Load life (108)	2000 hours at rated power at +25°C, +85°C or +125°C	± 0.5 % + 0.01 Ω	+ 0.05 %
	10,000 hours at rated power at +125°C	± 2 % + 0.01 Ω	+ 0.2 %
Storage life	10,000 hours no load at room conditions	-	+ 0.005 %

How to make an order

Model no._Ohmic Value_Tolerance-TC

For example:
UPR 120R 0.1% 2ppm or
UPSC 50R 0.1% 2ppm

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

sales@ebg-resistors.com · sales@ebg-us.com

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.