



Series SHP


Overall stability ± 5 ppm/ $^{\circ}\text{C}$ from $+25^{\circ}\text{C}$ to $+65^{\circ}\text{C}$ (incl. VCR & TCR)

1/1

We developed new material combinations and processing methods which make it possible to achieve a TCR (thermal coefficient of resistance) of up to ± 5 ppm while maintaining the minimal VCR (voltage coefficient of resistance).


Features

- up to 10 kV operating voltage
- Non-Inductive design
- ROHS compliant

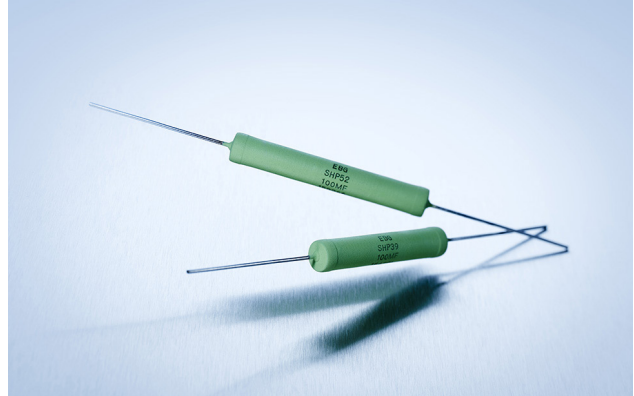

Technical Specifications

Resistance value	100 M Ω \leq 250 M Ω (other values on special request)
Resistance tolerance	± 1 % standard (lower on special request for limited ohmic values)
Temperature coefficient	± 5 ppm/ $^{\circ}\text{C}$ from $+25^{\circ}\text{C}$ to $+65^{\circ}\text{C}$ in 10 degree steps (incl. VCR & TCR) referenced to 25°C
Maximum working voltage	10 kV DC
Dielectric strength	≤ 10 kV DC based on the coating
Insulation resistance	10 G Ω min. at 1,000 V DC
Power rating	up to 1 W
Load life	1,000 hours at rated power at 70°C , ΔR 0.20 % max.
Load life stability	0.20 % per 1,000 hours at 70°C
Moisture resistance	MILStd-202, method 106, ΔR 0.4 % max.
Thermal shock	MILStd-202, method 107, Cond. A, ΔR 0.20 % max.
Encapsulation	standard coating: silicone conformal we recommend 2xpolyimide coating for use in oil and potted applications (ask for details)
Lead material	OFHC copper, tin-plated
Weight	depending on model no. (ask for details)

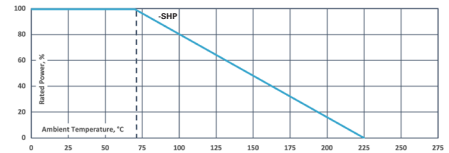

How to make a request


Model no. _Ohmic value_ Tolerance

For example:
SHP-52 150M 1%

Model Specifications

Model no.	Wattage	Max. kV	Resistance values		Dimensions in millimeters (inches)		
			Min. Ω	Max. Ω	A ± 0.50 ± 0.02	B ± 0.50 ± 0.02	C ± 0.05 ± 0.002
SHP-39	0.6	8	100 M	250 M	39.50 (1.555)	8.20 (0.323)	1.00 (0.040)
SHP-52	1	10	100 M	250 M	52.10 (2.051)	8.20 (0.323)	1.00 (0.040)
SHP-78	2.25	15	100 M	250 M	77.60 (3.055)	8.20 (0.323)	1.00 (0.040)

Dimensions in mm [inches]

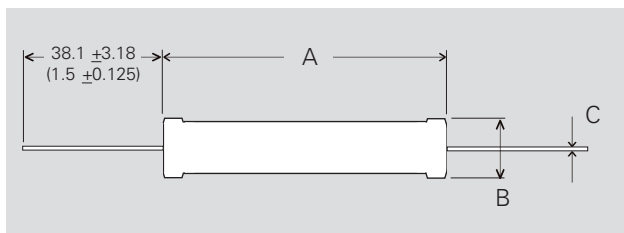

The above spec. sheet features our standard products. For further options please contact your local Miba Resistors representative.

sales.mra@miba.com · US: sales@mibaresistors.com

Miba Resistors former





Disclaimer

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of Miba Resistors.