

Series MTX 2000

up to 50 W and up to 80 kV

1/1

The MTX 2000 series consists of high-quality, high-precision, high-power, high-voltage dividers for use in sophisticated resistor networks. These custom designs support a wide range of resistance value, tight voltage ratios, close tolerances and low TCRs.



Features

- up to 80 kV operating voltage
- up to 50 W operating power
- Non-Inductive design
- ROHS compliant



Technical Specifications

Resistance value	see model specifications below
Resistance tolerance	see model specifications below
Temperature coefficient	see model specifications below
Max. operating temperature	-55°C to +125°C
Dielectric strength	> 1,000 V (25°C, 75 % relative humidity)
Load life	ΔR/R 0.15 % max., 1,000 hours at rated power
Moisture resistance	ΔR/R 0.25 % max.
Thermal shock	ΔR/R 0.2 % max.
Encapsulation	standard coating: silicone conformal we recommend 2xpolyimide coating for use in oil and potted applications (ask for details)
Lead material	caps, nickel-plated
Torque	1.8 Nm to 2 Nm for M4, 3.8 Nm to 4 Nm for M8
Connection	standard version having no wire tap connection. Pre soldered wire connection available on special request
Weight	depending on model no. (ask for details)

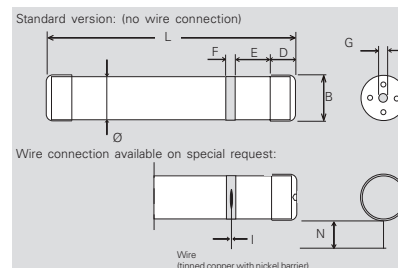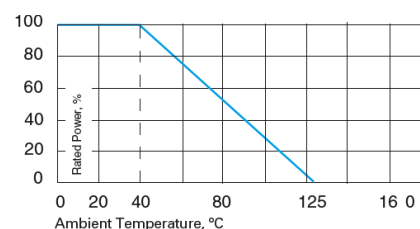

Dimensions in mm

Model no.	L	B	Ø	D	E	F	G	I	N
2000.23	156 ± 2	14.5 ± 0.2	13.5 ± 0.5	10 ± 0.2	8.5 ± 0.2	5 ± 0.5	M4	1.0 ± 0.1	30.0 ± 1
2000.105	308 ± 2.5	31.8 ± 0.3	30.5 ± 0.5	18 ± 0.2	40 ± 2	7 ± 0.5	M8	1.0 ± 0.1	30.0 ± 1

Model Specifications


Model no.	P Wattage 40°C	V Voltage kV DC	TCR absolute			Tolerance absolute			TCR ratio			Tolerance ratio		
			50 ppm/°C	25 ppm/°C	15 ppm/°C	0.25 % - 1 %	0.1 % - 1 %	0.1 % - 1 %	25 ppm/°C	15 ppm/°C	15 / 10 ppm /°C	0.5 % - 0.25 %	0.5 % - 0.1 %	0.5 % - 0.1 %
2000.23	10	40	R1 + R2 Ratio	2 MΩ - 2 GΩ 1:1000 - 1:20 000	20 MΩ - 1 GΩ 1:1000 - 1:20 000	20 MΩ - 500 MΩ 1:1000 - 1:10 000								
2000.105	50	80	R1 + R2 Ratio	20 MΩ - 3 GΩ 1:1000 - 1:20 000	20 MΩ - 2 GΩ 1:1000 - 1:20 000	20 MΩ - 1 GΩ 1:1000 - 1:10 000								

How to make a request

Model no._Ohmic Value_abs. & ratio Tolerance_abs. & ratio TCR_ratio

For example:

MTX 2000.105 500M abs. tol. 2% abs. TCR 25ppm, ratio tol. 1%, ratio TCR 15ppm, 10.000:1

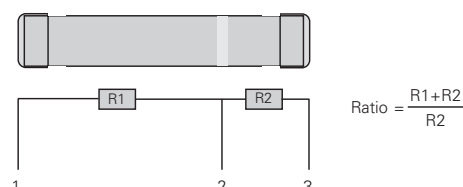

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

sales@ebg-resistors.com · sales@ebg-us.com

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.