

Series PCS

Precision Current Sense Resistors




A Miba Group Company

The PCS series uses EBG's state-of-the-art technology to provide a highly reliable resistor with a Non-Inductive design. This makes the PCS resistor ideal for many current-monitoring and control applications.

Features


- 3 W / 60 W / 100 W current sense resistor - 2 unique packages
- Four-terminal Kelvin connection
- 100% QC measurement
- Non-Inductive design
- ROHS compliant
- Housing materials in accordance with UL 94 V-0

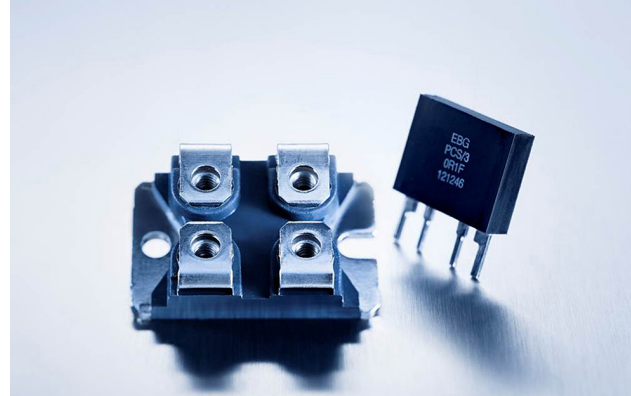

PCS-100

Resistance value	0.5 mΩ ≤ 1 Ω (other values on special request)
Resistance tolerance	±1 % to ±5 % (0.5 % on special request for limited ohmic values)
Temperature coefficient	< 60 ppm/°C (< 500 ppm/°C 27 mΩ to 49 mΩ) referenced to 25°C, ΔR taken at 15° and +105°C
Power rating	100 W (at 70°C case temperatur) up to 150 A permanent not to exceed Ohm's Law power load
Pulse current	up to 500 A / 0.5 sec. (depending on ohmic value)
Dielectric strength voltage	1,000 V DC (higher other on special request)
Heat resistance	R _{th} < 0.56 kW
Protection class	acc. to IEC 950/CSA22.2 950/M – 89 and EN 60950.88:2
Mounting – torque for contacts	1.1 Nm to 1.3 Nm 8 (static), screw-in depth max. 5 mm
Mounting – torque for base plate	1.3 Nm to 1.5 Nm (static)
Operating temperature	-55°C to +150°C
Storage temperature	-40°C to +85°C
Weight	~30 g


Power Rating (for all models)

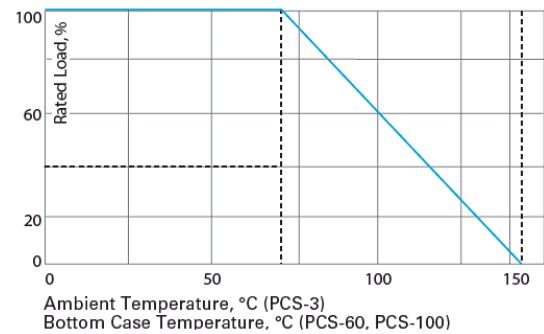

PCS-3

Resistance value	1 mΩ ≤ 60 mΩ (60 mΩ - 1 Ω on special request)
Resistance tolerance	±1 % to ±5 % (0.5 % on special request for limited ohmic values)
Temperature coefficient	60 ppm/°C (typical) referenced to 25°C, ΔR taken at -15°C and +105°C; for values > 60 mΩ (ask for details)
Power rating	3 W at 70°C 40 A permanent (higher on special request)
Pulse current	up to 200 A / 0.5 sec. (depending on ohmic value)
Load life	1,000 hours at rated power at +70°C, DR 0.2 % max.
Thermal shock	MIL-STD-202, method 107, Cond. A, DR 0.2 % max.
Moisture resistance	MIL-STD-202, method 106, DR 0.2 % max
Terminal material	Kelvin Terminals; tinned copper
Encapsulation	polyester over resistance element
Operating temperature	-55°C to +150°C
Storage temperature	-40°C to +85°C
Weight	~6 g


PCS-100 / PCS-60



C = current connection (source)
S = voltage connection (sense)

For dimensions, please see our HXP 200 series page 44.

PCS-3 Dimensions in mm [inches]

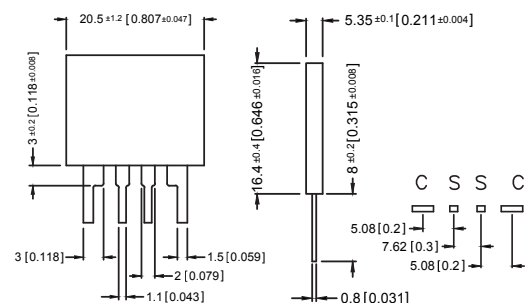

PCS-60 The resistor equals PCS-100 except:

Temperature coefficient	< 60 ppm/°C (< 500 ppm/°C: 20 mΩ to 49 mΩ) referenced to 25°C, ΔR taken at -15°C and +105°C
Power rating	60 W (at 70°C case temperature)
Dielectric strength voltage	up to 4,000 V DC or 2,800 V AC (higher values on special request)
Operating temperature	-55°C to +150°C
Storage temperature	-40°C to +85°C

How to make a request

Model no. _Ohmic Value_ Tolerance

For example:
PCS-100 0R08 1% or PCS-60 0R001 2%

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.