

Series UXP[®]-2000

2,000 W resistor at 125°C bottom case

For variable speed drives, power supplies, control devices, robotics, motor control and other power designs, the easy mounting fixture assures an auto-calibrated pressure to the cooling plate of about 300 N.

Features

- 2,000 W operating power
- Non-Inductive design
- ROHS compliant
- High insulation & partial discharge performance
- Materials in accordance with UL 94 V-0
- Resistor is also available with preapplied PCM (Phase Change Material) (ask for details)



Technical Specifications

Resistance value	0.15 Ω ≤ 0.99 Ω (HC-version) standard terminals 30/32 & 25/25 available, others on special request > 0.99 Ω ≤ 6 KΩ (higher values on request)
Resistance tolerance	±5 % to ±10 %
Temperature coefficient	±150 ppm/°C standard lower TCR on special request for limited ohmic values
Power rating	2,000 W at 125°C bottom case temperature resp. 60°C heat sink temperature
Short time overload	2,400 W at 70°C for 10sec., ΔR = 0.4% max.
Maximum working voltage	5,000 V DC ≅ 3,500 V AC RMS (50 Hz) higher voltage on request, not exceeding max. power
Maximum continuous current	120 A
Electric strength voltage	7 kVrms / 50 Hz / 500 VA, test time 1 min. between terminal und case (up to 12 kVrms on request) voltages above 10 kVrms are tested at DC equivalent to avoid pre damage of component
Partial discharge	4 kVrms < 10 pC (up to 7 kVrms < 10 pC on request) acc. to IEC 60270
Pulse peak current	up to 1,500 A depending on pulse length and frequency (ask for details)
Insulation resistance	> 10 GΩ at 1,000 V
Single shot voltage	up to 12 kV norm wave (1.5/50 μsec)
Creeping distance	> 42 mm (standard, higher on request)
Air distance	> 14 mm (standard, higher on request)
Inductance	≥ 80 nH (typical), measuring frequency 10 kHz
Capacity/mass	≥ 120 pF (typical), measuring frequency 10 kHz
Capacity/parallel	≥ 40 pF (typical), measuring frequency 10 kHz
Operating temperature	-55°C to +155°C
Mounting - torque for contacts	1.8 Nm to 2 Nm
Mounting - torque	1.6 Nm to 1.8 Nm M4 screws
Internal temperature sensor available on request	PT-1000 / PT-100 / Type K / Type J (ask for details)
Cable variation available on request	HV-cable / Flying leads (ask for details)
Standard cable type	H&S Radox 9 GKW AX 1,5mm ² (other cable types on special request)
Weight	~120 g

General Specifications

Electric support

Alumina ceramic metalized with EBG ALTOX film on the bottom for improved heat transfer and optimum discharge

Encapsulation

Resin-filled epoxy casing with large creeping distance to mass, large air distance between the terminals and high insulation resistance (CTI 600)

Resistance Element


Special design for low inductance and capacitance values. The element employs our special METOXFILM, which demonstrates stability while covering high wattage and pulse loading

Housing

Housings are made without color additives. The color definition is natural and can vary in different pigmentation

Contacts

- Easy load connection with M4 and M5 screws (Inch thread terminals on request)
- Connector height available from 25 to 42 mm
- Various sleeves for increasing creeping distance up to 85 mm or potted cable connections are available on request
- Contacts standard M5 (M4 on special request - connection screw thread max. 7 mm)

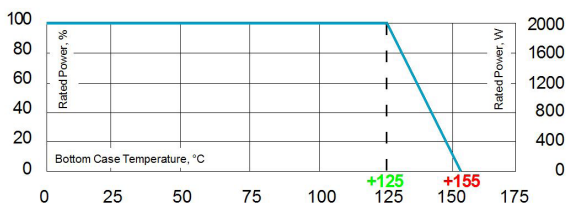


Derating (thermal resist.) UXP[®]-2000: 66.6 W/K (0.015 K/W)
Power rating: 2,000 W at 125°C bottom case temperature*
Please ask for detailed mounting procedure!

* Best results can be reached by using a thermal transfer compound with a heat conductivity of at least 2.9 W/mk. The flatness of the cooling plate must be better than 0.05 mm overall. Surface roughness should not exceed 6.4 μm.

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Dimensions in mm [inches]

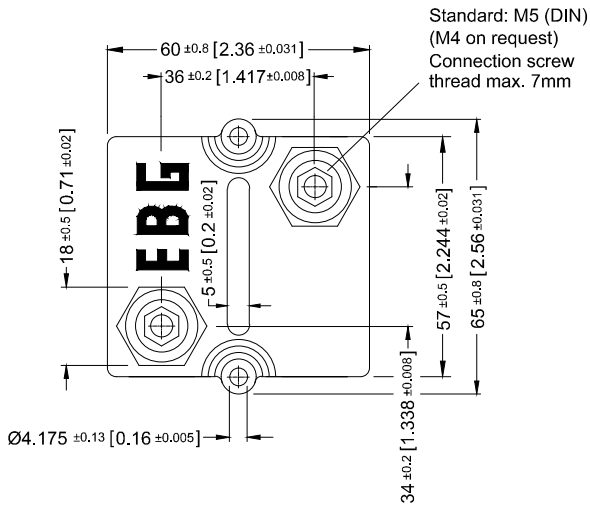

How to make an order

■ **Standard terminal**


UXP-2000_Ohmic Value_Tolerance_Terminal Height_Contact

For example
UXP-2000 10R 10% 30/32 M5

■ **Examples for optional terminals**

UXP-2000 24R 10% 25/25 M5

Borehole Distance

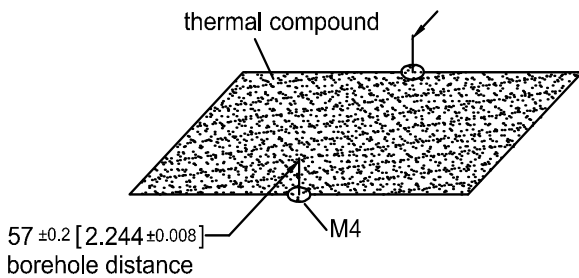


Standard Terminals


Air distance: 14mm [0.5512] min.

Creeping distance: 42mm [1.6535] min.

Terminal height 30/32 Standard

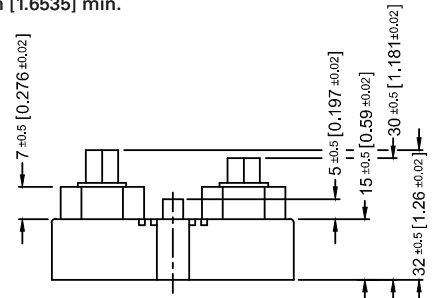


Terminal height 25/25 Optional

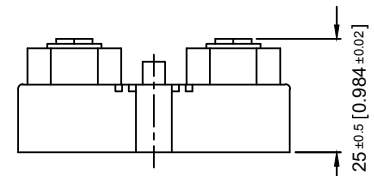


Terminal Options (for increased air & creeping distances)

Other terminal dimensions available, contact for more information


UXP-2000-9
Air distance: 25mm [0.984] min.
Creeping distance: 83mm [3.267] min.



UXP-2000-7
Air distance: 26.7mm [1.0512] min.
Creeping distance: 50mm [1.968] min.



UXP-2000-8
Air and creeping distance depends on length of HV-cable



Test Specifications*

Test	Method	Tolerance Drift**
Short time overload	2,400 W/10sec.	0.40%
Humidity steady state	56 days/40°C/95%	0.25%
Temp. Cycling	-55/+125/5cycles	0.20%
Shock	40g/4,000 times	0.25%
Vibrations	2-500Hz/10g	0.25%
Load life 3,000cyl	PN 30 min. on / 30 min off	0.40%
Terminal strengths	200 N for hexa. thread contacts	0.05%

* The test methods are according to IEC 60068-2

** The tolerance drift is the possible change of the resistance value because of the certain test

Please note most all of our UXP customers have their own custom designed drawing. Therefore please do not hesitate to discuss your special needs with the local representative or contact us directly.

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

sales@ebg-resistors.com · sales@ebg-us.com