

Series UXP®-2000

2,000 W resistor at 125°C bottom case



A Miba Group Company

1/2

For variable speed drives, power supplies, control devices, robotics, motor control and other power designs, the easy mounting fixture assures an auto-calibrated pressure to the cooling plate of about 300 N.


Features

- 2,000 W operating power
- Non-Inductive design
- ROHS compliant
- High insulation & partial discharge performance
- Materials in accordance with UL 94 V-0
- Resistor is also available with preapplied PCM (Phase Change Material) (ask for details)



Technical Specifications

Resistance value	$\geq 0.1 \Omega \leq 6 \text{ K}\Omega$ (higher values on request)
Resistance tolerance	$\pm 5 \%$ to $\pm 10 \%$
Temperature coefficient	$\pm 150 \text{ ppm}/^\circ\text{C}$ standard lower TCR on special request for limited ohmic values
Power rating	2,000 W at 125°C bottom case temperature resp. 60°C heat sink temperature
Short time overload	2,400 W at 70°C for 10sec., $\Delta R = 0.4\%$ max.
Maximum working voltage	5,000 V DC \approx 3,500 V AC RMS (50 Hz) higher voltage on request, not exceeding max. power
Maximum continuous current	150 A (HC or UHC version)
Electric strength voltage	7 kVrms / 50 Hz / 500 VA, test time 1 min. between terminal und case (up to 12 kVrms on request) voltages above 10 kVrms are tested at DC equivalent to avoid pre damage of component
Partial discharge	4 kVrms < 10 pC (up to 7 kVrms < 10 pC on request) acc. to IEC 60270
Pulse peak current	up to 1,500 A depending on pulse length and frequency (ask for details)
Insulation resistance	> 10 G Ω at 1,000 V
Single shot voltage	up to 12 kV norm wave (1.5/50 μsec)
Creeping distance	> 42 mm (standard, higher on request)
Air distance	> 14 mm (standard, higher on request)
Inductance	$\leq 80 \text{ nH}$ (typical), measuring frequency 10 kHz
Capacity/mass	$\leq 120 \text{ pF}$ (typical), measuring frequency 10 kHz
Capacity/parallel	$\leq 40 \text{ pF}$ (typical), measuring frequency 10 kHz
Operating temperature	-55°C to +155°C
Mounting - torque for contacts	1.8 Nm to 2 Nm
Mounting - torque	1.6 Nm to 1.8 Nm M4 screws
Internal temperature sensor available on request	PT-1000 / PT-100 / Type K / Type J (ask for details)
Cable variation available on request	HV-cable / Flying leads (ask for details)
Standard cable type	H&S Radox 9 GKW AX 1,5mm ² (other cable types on special request)
Suggested storage condition	in dark ambient at > 0°C to + 85°C; max. 80%rel. humidity for 12 months -> DO NOT remove the resistor from the original packing until you are ready to mount

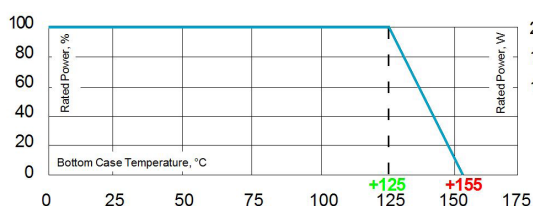Weight ~100 g


Derating (thermal resist.) UXP®-2000: 66.6 W/K (0.015 K/W)
 Power rating: 2,000 W at 125°C bottom case temperature*
 Please ask for detailed mounting procedure!

* Best results can be reached by using a thermal transfer compound with a heat conductivity of at least 2.9 W/mk. The flatness of the cooling plate must be better than 0.05 mm overall. Surface roughness should not exceed 6.4 μm .

General Specifications

Electric support

Alumina ceramic metalized with EBG ALTOX film on the bottom for improved heat transfer and optimum discharge

Encapsulation

Resin-filled epoxy casing with large creeping distance to mass, large air distance between the terminals and high insulation resistance (CTI 600)

Resistance Element

Special design for low inductance and capacitance values. The element employs our special METOXFILM, which demonstrates stability while covering high wattage and pulse loading

Housing

Housings are made without color additives. The color definition is natural and can vary in different pigmentation

Contacts


- Easy load connection with M4 and M5 screws (Inch thread terminals on request)
- Connector height available from 25 to 42 mm
- Various sleeves for increasing creeping distance up to 85 mm or potted cable connections are available on request
- Contacts standard M5 (M4 on special request - connection screw thread max. 7 mm)

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Series UXP®-2000



Dimensions in mm [inches]

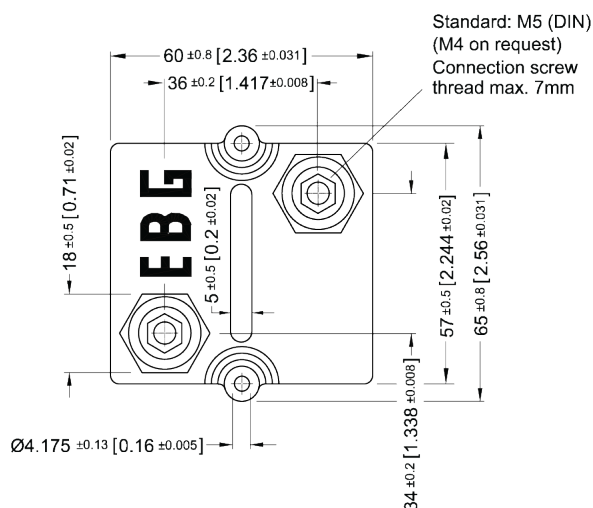

How to make a request

■ Standard terminal

UXP-2000_Ohmic Value_Tolerance_Terminal Height_Contact


For example

UXP-2000 10R 10% 30/32 M5

■ Examples for optional terminals

UXP-2000 24R 10% 25/25 M5

Borehole Distance

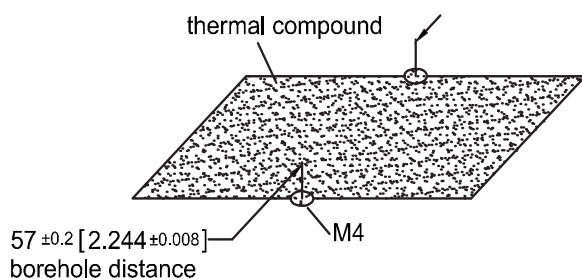


Standard Terminals

Air distance: 14mm [0.5512] min.

Creeping distance: 42mm [1.6535] min.


Terminal height 30/32

Standard

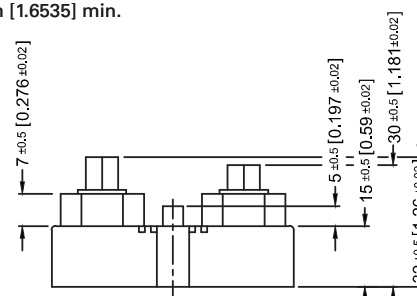

Terminal height 25/25

Optional

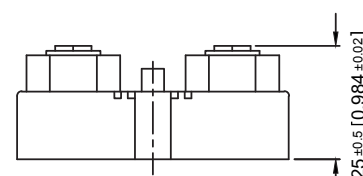


Terminal Options (for increased air & creeping distances)

Other terminal dimensions available, contact for more information

UXP-2000-9

Air distance: 25mm [0.984] min.


Creeping distance: 83mm [3.267] min.



UXP-2000-7


Air distance: 26.7mm [1.0512] min.

Creeping distance: 50mm [1.968] min.



UXP-2000-8

Air and creeping distance depends on length of HV-cable



Test Specifications*

Test	Method	Tolerance Drift**
Short time overload	2,400 W/10sec.	0.40%
Humidity steady state	56 days/40°C/95%	0.25%
Temp. Cycling	-55/+125/5cycles	0.20%
Shock	40g/4,000 times	0.25%
Vibrations	2-500Hz/10g	0.25%
Load life 3,000cyl	PN 30 min. on / 30 min off	0.40%
Terminal strengths	200 N for hexa. thread contacts	0.05%

* The test methods are according to IEC 60068-2

** The tolerance drift is the possible change of the resistance value because of the certain test

Please note most all of our UXP customers have their own custom designed drawing. Therefore please do not hesitate to discuss your special needs with the local representative or contact us directly.

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

sales@ebg-resistors.com · sales@ebg-us.com

Disclaimer



A Miba Group Company

The given statements and information herein are recommendations for the use of our products and are based on our experience in combination with applicable technical standards.

They are for guidance only and do not represent any assurance of characteristics or warranty commitments for the products or their suitability for specific applications.

The suitability of the products for the intended use by the user depends on different boundary conditions and influencing factors and is to be assessed exclusively by the user.

DISCLAIMER:

NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, IS MADE WITH RESPECT TO THE PRODUCTS, DESIGNS, DATA, INFORMATION DESCRIBED OR ANY INTELLECTUAL PROPERTY CONTAINED THEREIN. ANY WARRANTY OR GUARANTEE OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS ALSO EXCLUDED.

The given statements and information herein reflect the current status at the time of publication.

Typing or printing errors cannot be excluded.

This publication shall not be reprinted or reproduced in whole or in part in any form or by any means without the express written permission of EBG.